


Overhead Sidekick™ Torque Tube For Torque Reactions up to 135 Nm (100 ft-lbs)



MODEL OTS-M-TT135-B

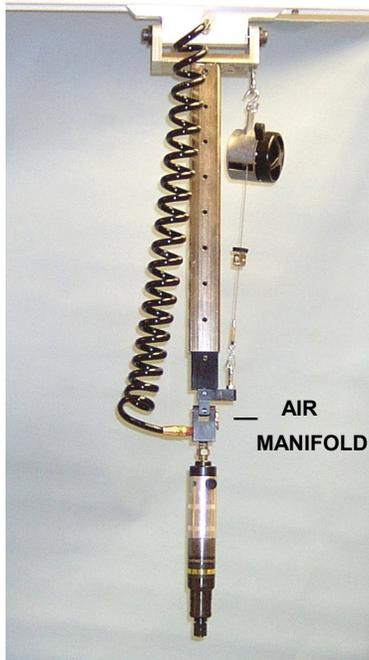

MODEL OTS-C-TT135-FL

- For vertical and horizontal drive applications
- Can be used with in-line, pistol grip and rt. angle tools; air or electric
- Vertical stroke 12"
- Adjustable length in 2" increments
min. adjustment: 25" min. to 37" max.
max. adjustment: 39" min. to 51" max.
- E-Z Glide 6-wheel trolley will not lock up or seize. Fits into the Unistrut P1000 rail. For Hubbell WS50 rail, add suffix -H to part number
- OTS-M includes air manifold
OTS-C includes tool clamp
- Includes retracting balancer (suffix - B) or Feather Lite air balancing system (suffix - FL)
- Max. tool weight: 7 lbs. (- B) or 25 lbs. (- FL)



- Arm tilts front to back at the trolley
- Manifold can be mounted so that tool can tilt either front to back or left to right
- Torque reaction protection in all drive directions



- Right angle nutrunner mounts in standard tool clamp (OTS-C)
- Tool clamp can be mounted so that it tilts either front to back or left to right
- Air nutrunner can be mounted vertically from a manifold (OTS-M) for horizontal drive.



- In-line electric driver mounts in a standard tool clamp (OTS-C)
- Tilting tool clamp allows for horizontal or vertical drive and all directions in between
- Tool clamp can be mounted so that it tilts either front to back or left to right